

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 156 573 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
21.11.2001 Bulletin 2001/47

(51) Int Cl.7: **H02J 9/06**(21) Application number: **01304223.9**(22) Date of filing: **11.05.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

• **The Tokyo Electric Power Co., Inc.**
Tokyo 100-0011 (JP)

(72) Inventor: **Abe, Hiroyuki, c/o NGK Insulators, Ltd.**
Nagoya City, Aichi Pref. 467-8530 (JP)

(30) Priority: **18.05.2000 JP 2000146834**


(74) Representative: **Paget, Hugh Charles Edward et al**
MEWBURN ELLIS
York House
23 Kingsway
London WC2B 6HP (GB)

(71) Applicants:
• **NGK INSULATORS, LTD.**
Nagoya-City, Aichi Prefecture 467-8530 (JP)

(54) High-temperature secondary battery based energy storage and power compensation system

(57) The high temperature secondary battery based energy storage and power compensation system is so formed that electric power supply system, electric load, and electric energy storage system including a high temperature secondary battery and a power conversion system, are electrically connected with one another. When operating normally, electric power is supplied from the electric power supply system to the electric load, while the electric energy storage system operates to effect peak shaving running and load leveling running.

A high speed switch is provided between the electric power supply system and the electric energy storage system, so that when a voltage sag or a service interruption occurs while the electric power is being supplied from the electric power supply system, the voltage sag is immediately detected and the circuit is immediately shut off, an electric power is immediately supplied from the electric energy storage system to the electric load so as to compensate for the voltage sag or the service interruption.

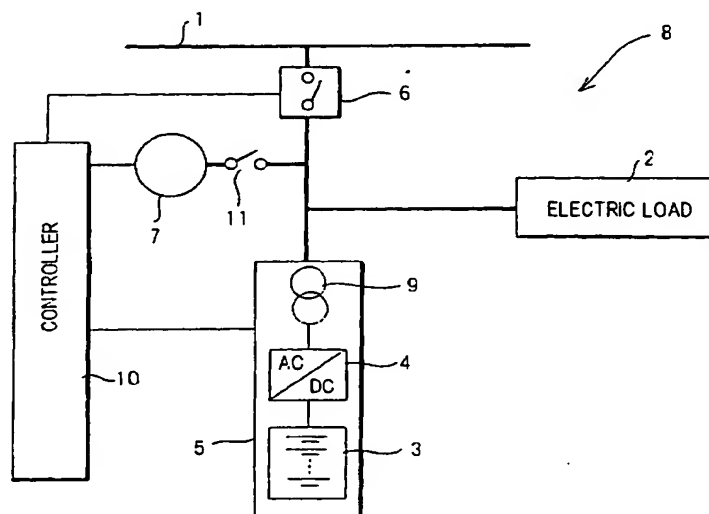FIG. 1

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates to a high-temperature secondary battery based energy storage and power compensation system.

Description of the Related Art

[0002] Conventionally, various energy storage systems for carrying out a peak shaving function as well as a load leveling function have been proposed. Although the proposed systems have been put into practical use in pumped storage hydro, none of the proposed systems has a power compensation function for compensating for a voltage sag or a service interruption, all of which are likely to happen suddenly in power supply systems.

[0003] Various electric power quality stabilizing apparatus formed by using semiconductor electric power conversion apparatuses capable of inhibiting harmonic distortion as well as voltage fluctuations have also been proposed. In fact, these electric power quality stabilizing apparatuses have been practically used in active filters and static Var compensator(SVC). Furthermore, to compensate for voltage sag and service interruption, UPSs have been proposed and have already been put into practical use. However, none of the apparatuses mentioned above has a peak shaving function or a load leveling function.

SUMMARY OF THE INVENTION

[0004] The present invention has been accomplished in order to solve the above problems. It is an object to provide an economical, high-temperature secondary battery based energy storage and a power compensation system which has a peak shaving function and a load leveling function, as well as an electric power quality stabilizing function.

[0005] According to the present invention, there is provided a high-temperature secondary battery based energy storage and power compensation system, comprising:

- an electric power supply system;
- an electric load;
- an electric energy storage system including a high-temperature secondary battery and a power conversion system (PCS);
- wherein the electric power supply system, the electric load and the electric energy storage system are electrically connected, and from which, when operating normally, electric power is supplied to the electric load while the electric energy storage system operates to effect peak shaving running and load

leveling running; and

a high speed switch provided between the electric power supply system and the electric energy storage system;

when a voltage sag or a service interruption occurs in the electric power being supplied from the electric power supply system, the voltage sag is immediately detected, the circuit is temporarily shut off, electric power is immediately supplied from the electric energy storage system to the electric load in order to compensate for the voltage sag or the service interruption.

[0006] Further, according to the present invention, the high temperature secondary battery is preferably a sodium sulfur battery.

[0007] Moreover, according to the present invention, it is preferred that the energy storage system for compensating for a voltage sag or a service interruption is a system capable of outputting a compensation electric power which is 3 to 8 times the rated electric power of the peak shaving running and the load leveling running.

[0008] In addition, according to the present invention, it is preferred that a back-up generator is connected to a circuit on the electric power compensation side of the high speed switch, a voltage compensation controller is provided which is capable of detecting a circuit shutdown effected by the high speed switch, sending a command in accordance with the detection signal to cause the energy storage system to discharge a load entire electric power, and at the same time starting the back-up generator, so that if the electric power supply is not restored within a predetermined time period, the back-up generator is connected in parallel with the system, while at the same time the electric power supply from the energy storage system is stopped.

[0009] Furthermore, according to the present invention, it is preferred that an electric power supply system comprising an electric power supply system, an electric load, and an electric energy storage system including a high-temperature secondary battery and a PCS; all of which being electrically connected with one another so as to supply an electric power from the electric power supply system to the electric load under normal operation conditions, and operating the electric energy storage system in order to effect peak shaving running and load leveling running; wherein said system further comprises a control function capable of coping with a fluctuation derived from an accident such as a spike and a frequency fluctuation in the electric power, by detecting immediately such an accident, and sending a signal based on detection to the electric energy storage system in order to compensate for the fluctuation.

[0010] Moreover, according to the present invention, it is preferred that spare high-temperature batteries connected in parallel with the module batteries are provided so as to cope with a case when the module batteries fail, by switching module batteries to the spare batteries.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011]

Fig. 1 is a schematic view showing one embodiment of the high temperature secondary battery based energy storage and power compensation system formed according to the present invention.

Fig. 2 is a graph showing the contents of the load leveling running effected by using the energy storage system of the present invention.

Fig. 3 is a graph showing how a voltage sag when the service interruption occurs in an electric power supply system is prevented by using the high-temperature secondary battery based energy storage and power compensation system formed according to the present invention.

Fig. 4 is a graph showing how a load current having a deformed wave in an electric power supply system is compensated for by using the high temperature secondary battery based energy storage and power compensation system formed according to the present invention.

Fig. 5 is a schematic view showing an example (1) of another embodiment of the high-temperature secondary battery based energy storage and power compensation system formed according to the present invention.

Fig. 6 is a graph showing how an output fluctuation of an electric power generated by a renewable energy is compensated for, by using the high temperature secondary battery based energy storage and power compensation system formed according to the present invention.

Fig. 7 is an explanatory view schematically showing an example (2) of another embodiment of the high temperature secondary battery based energy storage and power compensation system formed according to the present invention.

Fig. 8 is a graph showing how an output fluctuation of an electric power sent from a power supply system is compensated for by using the high temperature secondary battery based energy storage and power compensation system formed according to the present invention.

Fig. 9 is a circuit diagram demonstrating a short-time high-output function of a sodium sulfur battery.

Fig. 10 is a graph showing a short-time high-output characteristic of the sodium sulfur battery.

Fig. 11 is an explanatory view showing in detail an example in which the high-temperature secondary battery based energy storage and power compensation system formed according to the present invention is used in an electric load (factory).

Fig. 12 is an explanatory view showing in detail an example in which the high-temperature secondary battery based energy storage and power compensation system formed according to the present in-

vention and including spare batteries are used in an electric load (factory).

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0012] The present invention will be explained in detail by referring to the embodiments described below. However, it is to be understood that the invention is not limited to these embodiments.

[0013] At first, the invention will be described in accordance with Fig. 1 which represents one embodiment of the present invention.

[0014] Fig. 1 shows a high-temperature secondary battery based energy storage and power compensation system. As shown in the drawing, the energy storage and power compensation system comprises an electric power supply system 1, a load 2, and an energy storage system 5, which are all electrically connected to one another. The energy storage system 5 includes a high-temperature secondary battery 3 and a PCS 4. A high speed switch 6 is provided in the circuit between the electric power supply system 1 and the electric energy storage system 5. Further, in a circuit formed between the high speed switch 6 and the load 2, a high temperature secondary battery based energy storage and power compensation system 8 equipped with a back-up generator 7 is provided. A transformer 9 is provided on the AC side of the PCS 4, while a circuit breaker 11 is provided in connection with the back-up generator 7.

[0015] The high-temperature secondary battery based energy storage and power compensation system 8, which is constructed in accordance with the present invention, is usually employed to supply electric power from the electric power supply system 1 to the load 2. On the other hand, as shown in the graph of Fig. 2, the energy storage system 5 is operated in order to charge the high temperature secondary battery 3 with electric power at night, that is during the period from 10 PM to 7 AM. In this way, it is possible to perform so-called load leveling running in which the stored electricity can be discharged during the day time when a relatively large amount of electricity is required, as well as so-called peak shaving running in which the stored electricity can be discharged during the period from 1 PM to 3 PM in summer when a relatively large amount of electricity is required.

[0016] In Fig. 2, the broken line shows the load curve of during one day, and the solid line shows the electric power supply from the grid during one day. During the period of 10 PM to 7 AM, some of the electric power in the night is used to charge a sodium sulfur battery 3 in the electric energy storage system 5. Conversely, during the period from 8 AM to 6 PM, an amount of the stored electricity is discharged from the electric energy storage system 5 in order to meet the demands corresponding to the increased electric load during this period of time, thereby the reduction in a maximum amount of electric

power in the electric power supply system can be attained.

[0017] In the case where a sodium sulfur battery is used as a high-temperature secondary battery, the sodium sulfur battery not only has a high density and a long usable lifetime, but also can produce a high output within a short time period and has a high speed response. Furthermore, the electric energy storage system using the sodium sulfur battery can be fully automated. Moreover, since the electric energy storage system 5 is completely sealed, maintenance is easy. In this way, the electric energy storage and power compensation system 8 according to the present invention is characterized in that it uses a sodium sulfur battery. However, such a high-temperature secondary battery may also be a sodium-metal chloride battery.

[0018] Usually, whenever a voltage sag occurs in the electric power being supplied from the electric power supply system 1 or a service interruption occurs, such an accident affects adversely on the electric load 2. In particular, when the electric load 2 is an important production equipment controlled by computer, such a momentary voltage drop can cause a considerably severe damage to the production system.

[0019] In order to properly deal with a situation in which a voltage sag or a service interruption occurs, a back-up generator is usually provided in an electric power supply circuit. However, a problem still exists that at least 10 seconds are required for the back-up generator to start supplying the necessary electric power to the electric load.

[0020] The high temperature secondary battery based energy storage and power compensation system 8 according to the present invention is formed so that it can operate in the manner shown in Fig. 3. Namely, whenever there is a voltage sag in the electric power being supplied from the electric power supply system 1 or a service interruption occurs, the high speed switch 6 will operate to immediately shut off the circuit, while at the same time effecting a temporary, instantaneous discharge of the entire electric load from the electric energy storage system 5. Meanwhile, the generator is started, and there is an interval of about fifteen seconds, before the entire load electric power is shifted to the generator. In fact, the interval of about fifteen seconds can be compensated for by an electric power output from the electric energy storage system 5 utilizing the sodium sulfur battery.

[0021] As shown in Fig. 3, the high speed switch 6 operates at time t_1 to shut off the circuit, and the electric energy storage system 5 utilizing the sodium sulfur battery will immediately start to supply an electric power, and at the same time, the generator is started. Then, about fifteen seconds later, i.e., at t_2 , the generator 7 is fully completely started and the circuit breaker is operated. Afterwards, at t_3 , the shift from the sodium sulfur battery to the generator is completely, thereby ending the electric discharge from the electric energy storage

system 5.

[0022] On the other hand, in the case where a power compensation is needed only for a voltage sag, it is not necessary to use the back-up generator 7. A semiconductor switch is preferably used as the high speed shut-off switch 6. This is because, whenever there is a voltage sag, the semiconductor switch can immediately shut off the circuit and thus exhibits an excellent high speed response. If the circuit does not shut off immediately, the electric power discharged from the energy storage system 5 utilizing a sodium sulfur battery having an excellent high speed response will undesirably flow back to the power supply system, rendering it impossible to supply electric power corresponding to a load electric power to be compensated to the load.

[0023] Furthermore, it is possible to make use of the sodium sulfur battery system having a PCS. Namely, as shown in Fig. 4, the load current having a deformed wave can be improved to an overall load current without any distortion by virtue of a distortion compensation output from the energy storage system 5 utilizing the sodium sulfur battery.

[0024] As described in the above, the energy storage and power compensation system 8 according to the present invention can, under normal operation, perform load leveling running as well as peak shaving running. Meanwhile, the energy storage and power compensation system can instantly compensate for an entire electric load whenever there is a voltage sag or when a service interruption occurs, thereby protecting important load or manufacturing system from severe damage. In addition, it is also possible to stabilize the quality of an electric power at each terminal of the system, as well as to effect an SVC running.

[0025] Fig. 5 is used to indicate one example (1) serving as another embodiment for carrying out the present invention.

[0026] When electricity generating equipment 13 using renewable energy is provided in an electric power supply system located between a distribution substation 12 and an electric power user 2, the energy storage and power compensation system 8 formed according to the present invention can be operated to compensate for an output fluctuation of the generator 13.

[0027] That is, this embodiment is directed to an energy storage and power compensation system comprising an electric power supply system 1, and an electric energy storage system 5 being is connected with said supply system and consisting of a sodium sulfur battery 3 and a PCS 4, characterized in that an electric power compensation controller 14 capable of detecting an output from the generator 13 and outputting a signal to supply an electric power from the energy storage system 5 for compensating the output is provided between the electricity generating equipment 13 and the electric energy storage system 5.

[0028] Thus, the electric energy storage system 5 is capable of not only performing a load leveling running

and a peak shaving running, but also absorbing output fluctuation derived from a variation in nature of the electricity generating equipment 13 involving the use of renewable energy resource.

[0029] Fig. 6 shows an example wherein an output fluctuation of the electricity generating equipment 13 equipped with a solar cell and a wind turbine generator was compensated by outputting a power from the energy storage system 5 based on the electric power compensation controller 14 so as to cope with the fluctuation during the period of from 8 AM to 6 PM.

[0030] Fig. 7 shows an example (2) serving as a further embodiment for carrying out the present invention.

[0031] The energy storage and power compensation system 8 according to this embodiment of the present invention comprising an electric energy storage system 5 consisting of a sodium sulfur battery 3 and a PCS 4 being provided in a power supply system 1 extending between the distribution substation 12 and the electric load 2; characterized in that an electric power quality stabilizing controller 15 capable of detecting the voltage, the current and the frequency of an electric power supplied from the power supply system 1, and also capable of outputting power in proportion to deflections of the above parameters from the energy storage system 5, in accordance with detection signals, is provided between the electric power supply system 1 and the electric energy storage system 5.

[0032] Thus, the electric energy storage system 5 is capable of performing not only load leveling running and peak shaving running, but also operations in proportion to the electric power fluctuation. Therefore, it is possible to effect a desired compensation to ensure stabilized power supply.

[0033] Fig. 8 shows an example in which the controller operates to obtain a compensation electric power from the energy storage system 5, so as to compensate for various fluctuations of an electric power flowing to the electric power system 1, thereby ensuring a high quality electric power supply.

Examples

[0034] Examples of the present invention will be described in the following.

Example 1

[0035] This example shows a short-time high-output function of the sodium sulfur battery.

[0036] A sodium sulfur single battery (open-circuit voltage 2.075 V), a 28-m Ω resistor 17a, a 1-m Ω resistor 17b, and a switch 18 are connected in the manner shown in Fig. 9, thereby forming a predetermined circuit. A rated discharge is performed on the 28-m Ω resistor 17a, the switch 18 is opened or closed so as to effect a short-time high-output discharge on the 1-m Ω resistor 17b. Fig. 10 (which is a graph) shows the result obtained

when a high output discharge is repeated every hour during the rated discharge.

[0037] As shown in the graph, during 15 second-output and 30 second-output, it is possible to effect a discharge which is about 5 to 6 times greater than a rated current (for eight hours). Namely, the sodium sulfur battery based energy storage and power compensation system formed according to the present invention is characterized in that it employs the above described sodium sulfur battery, forming a system capable of performing a load leveling running, as well as providing a function of preventing an instantaneous voltage drop.

Example 2

[0038] Fig. 11 shows in detail an example in which the sodium sulfur battery based energy storage and power compensation system 8 formed according to the present invention can be used in an electric load (factory) 2 having a total load of 5 MW.

[0039] A energy storage system 5 including ten units of 500 KW PCSs 4 and sodium sulfur batteries 3 is electrically connected to a high speed semiconductor switch 6, an electric power supply system 1 and an electric load 2, in the manner shown in Fig. 11. Under normal operation, the energy storage system 5 receives at night an electric charge from the electric power supply system 1, but during daytime when there are increased needs for electric power because a lot of electric load such as air conditioning equipment and air conditioners are in use, the energy storage system 5 discharges 1 MW electric power, thereby effecting load leveling running.

[0040] When there is a voltage sag or a service interruption, the high speed switch 6 operates to immediately shut off the circuit, while at the same time an electric power of 5 MW is spontaneously discharged from the energy storage system 5 within 30 seconds, thereby ensuring a power supply having stabilized quality without any voltage drop, until the service interruption is over and an ordinary power supply has been restored.

[0041] In Fig. 11, the discharge is indicated as a PQ discharge (Power Quality discharge). In the case there is a back-up generator (not shown), 30 seconds would be sufficient to bridge the power source from the energy storage system to the back-up generator. Accordingly, even if the service interruption period is relatively long, it is still possible to supply an electric power having a high and stabilized quality to the electric load (factory) 2.

[0042] Fig. 12 shows in detail an example in which a group of spare batteries 19 are arranged for use with a high-temperature battery system of the present invention, which is provided for an electric load having a total load of 10 MW. If, in the event of an accident, a module battery 3 has a failure, the failed group is opened while the spare group 19 can be connected in parallel to the circuit, thereby improving the reliability for supplying an electric power. In such a case, since each group includes 2 module batteries 3, if the system is used for a

long time, the second battery also fails, a healthy module battery of the failed group (in opened condition) can be used to replace the second failed battery. In this way, it is possible for the system to run for an extremely long time, ensuring an improved reliability.

[0043] As may be understood from the above description, the high-temperature secondary battery based energy storage and power compensation system formed according to the present invention, is a system capable of performing peak shaving running as well as load leveling running, thereby ensuring an improved, stable, and high quality electric power supply. Therefore, the energy storage and power compensation system of the present invention is suitable not only for effectively making use of the electric power in the night time, but is also suitable for supplying to a factory or the like facilities a high quality electric power capable of preventing an voltage sag in important equipment, stabilizing an output electric power generated even by fluctuating renewable energy, and which is capable of compensating for spike, frequency fluctuations and harmonic distortions.

Claims

1. A high-temperature secondary battery based energy storage and power compensation system, comprising:

an electric power supply system;
an electric load ;
an electric energy storage system including a high-temperature secondary battery and a power conversion system,
wherein the electric power supply system, the electric load and the electric energy storage system are electrically connected, and from which, when operating normally, electric power is supplied to the electric load while the electric energy storage system operates to effect peak shaving running and load leveling running; and a high speed switch provided between the electric power supply system and the electric energy storage system;
when a voltage sag or a service interruption occurs in the electric power being supplied from the electric power supply system, the voltage sag is immediately detected, circuit is temporarily shut off, electric power is immediately supplied from the electric energy storage system to the electric load in order to compensate for the voltage sag or the service interruption.

2. A high-temperature secondary battery based energy storage and power compensation system according to claim 1, wherein the high-temperature secondary battery is a sodium sulfur battery.

3. A high-temperature secondary battery based energy storage and power compensation system according to claim 1, wherein the energy storage system for compensating for the voltage sag or the service interruption is a system capable of outputting a compensation electric power which is 3 to 8 times a rated electric power of the peak shaving running and the load leveling running.

4. A high-temperature secondary battery based energy storage and power compensation system according to claim 1, further comprising: a back-up generator which is connected to the circuit on the electric power compensation side of the high speed switch;

a voltage compensation controller capable of detecting a circuit shut-off effected by the high speed switch, sending a command in accordance with a detection signal to cause the energy storage system to discharge an entire electric load, and, at the same time, starting the back-up generator, so that if the electric power supply is not restored within a predetermined time period, the back-up generator is connected in parallel with the system, while at the same time the electric power supply from the energy storage system is stopped.

5. A high-temperature secondary battery based energy storage and power compensation system comprising the electric power supply system, the electric load, and the electric energy storage system including the high-temperature secondary battery and the power conversion system; all of which being electrically connected with one another so as to supply an electric power from the electric power supply system to the electric load under normal operation conditions, and operating the electric energy storage system in order to effect peak shaving running and load leveling running according to claim 1, wherein said system further comprises a control function capable of coping with a fluctuation derived from an event such as a spike and a frequency fluctuation in the electric power supplied, by detecting immediately such an event, and sending a signal based on detection to the electric energy storage system in order to compensate for the fluctuation.

6. A high-temperature secondary battery based energy storage and power compensation system according to claim 1, wherein spare high temperature batteries connected in parallel with module high temperature batteries are provided so as to cope with a case that module batteries fail by switching from failed module batteries to the spare high temperature batteries.

FIG. 1

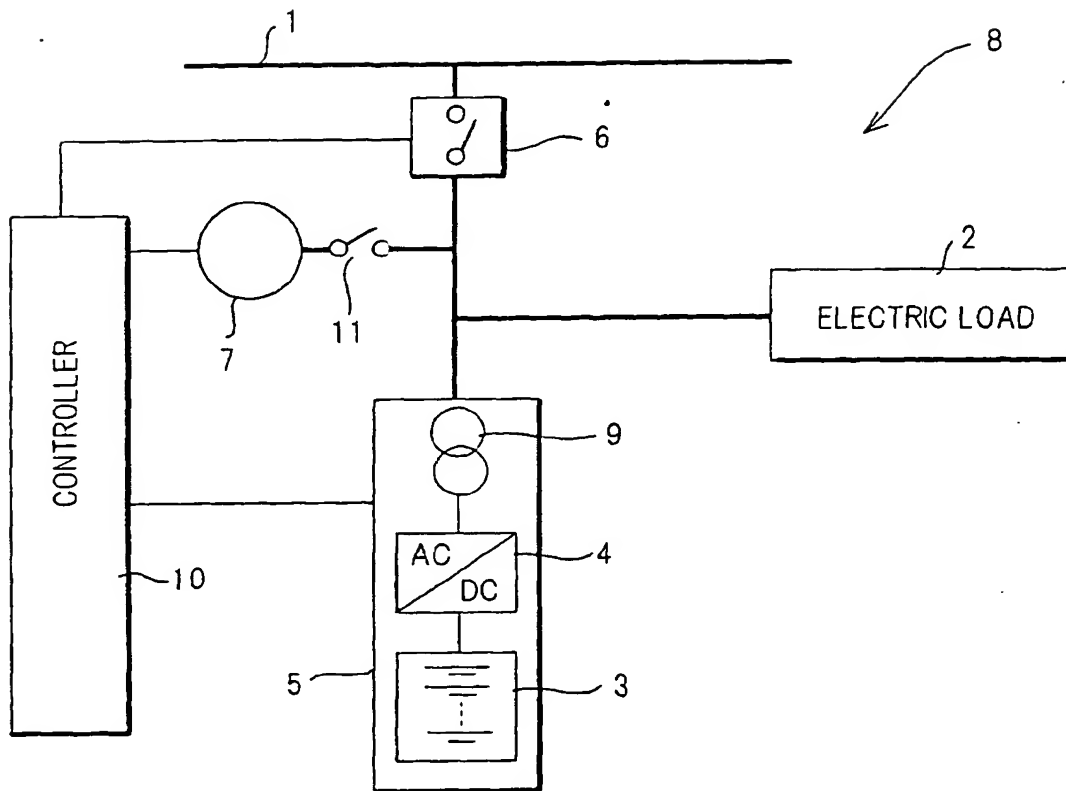


FIG. 2

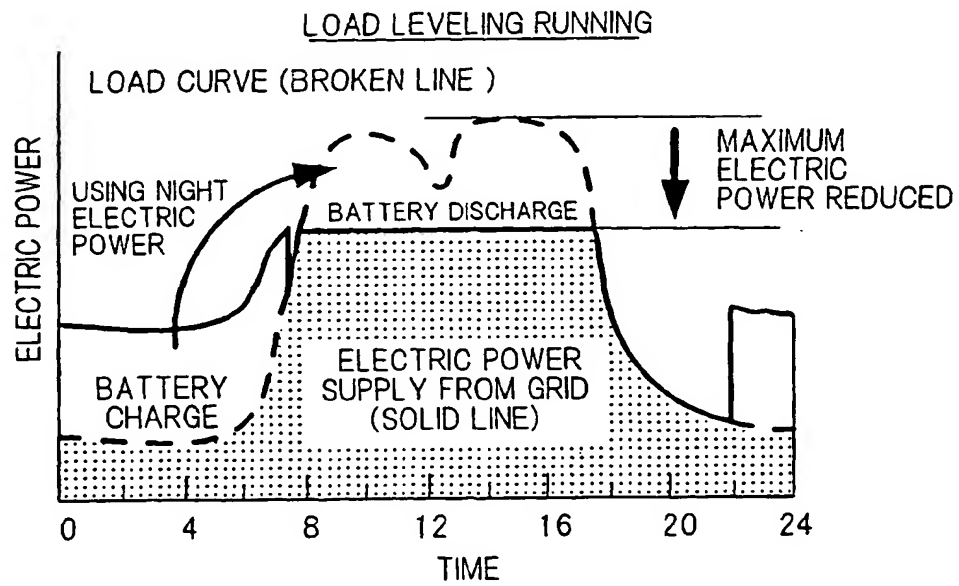


FIG. 3

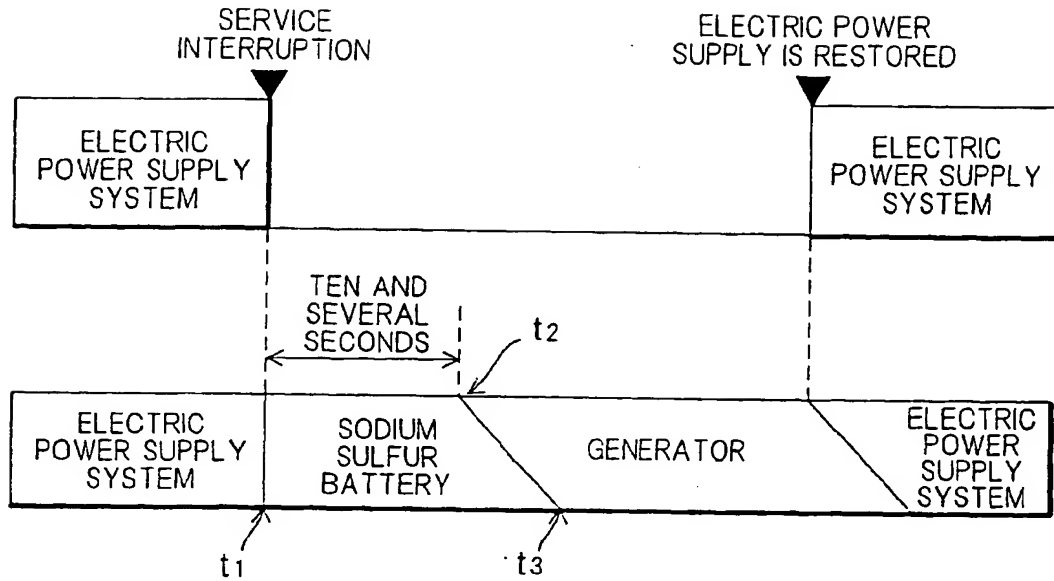


FIG. 4

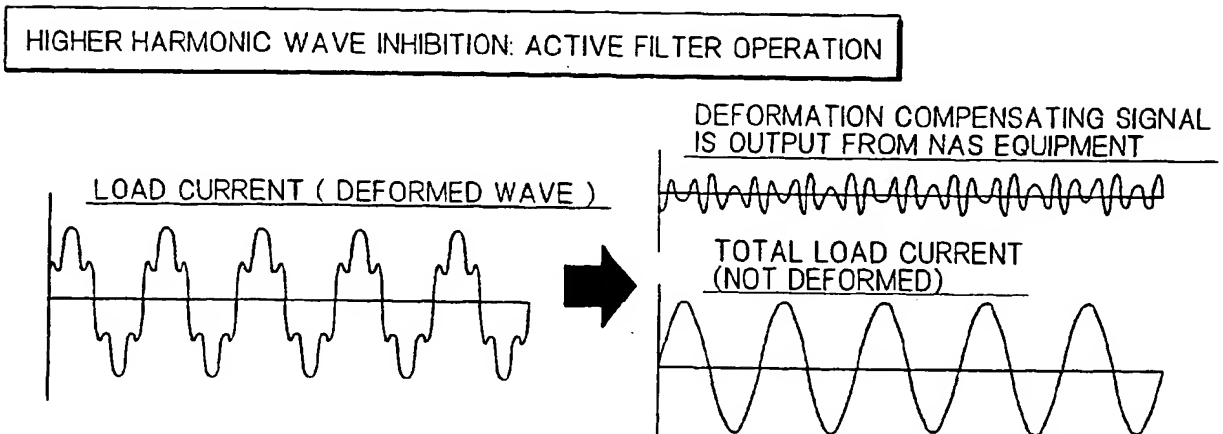


FIG. 5

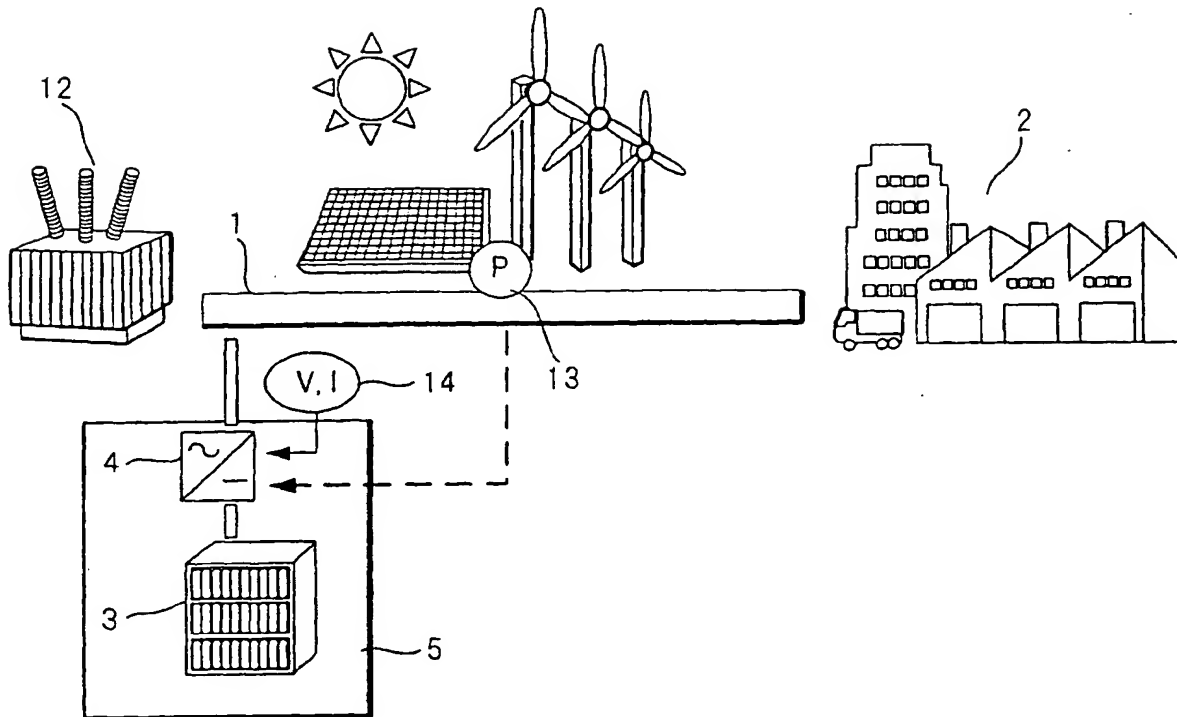


FIG. 6

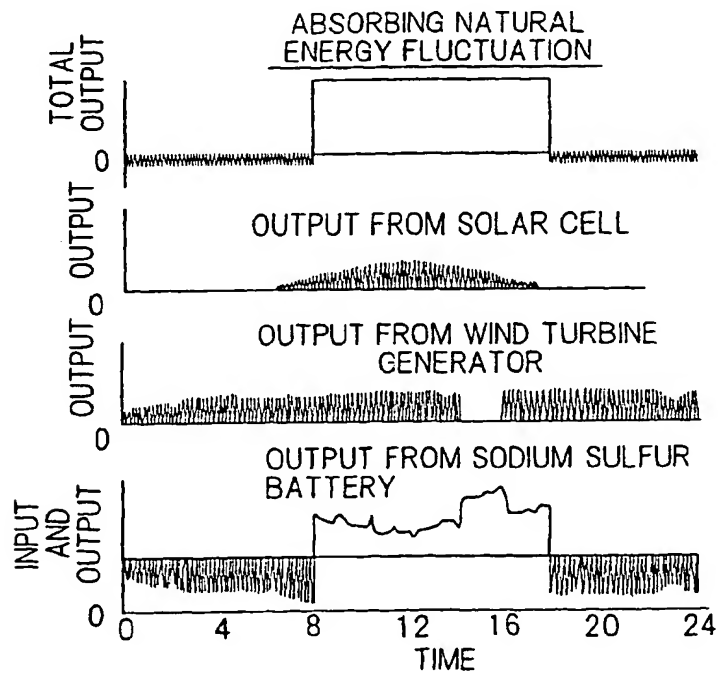


FIG. 7

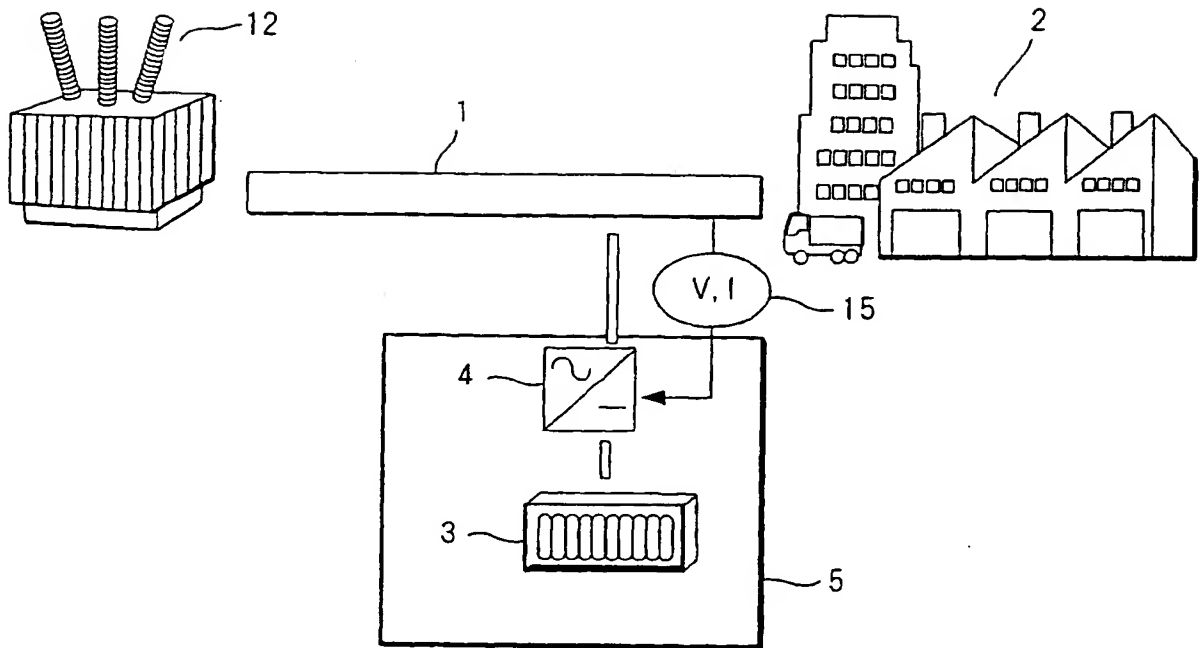


FIG. 8

ELECTRIC POWER QUALITY STABILIZATION

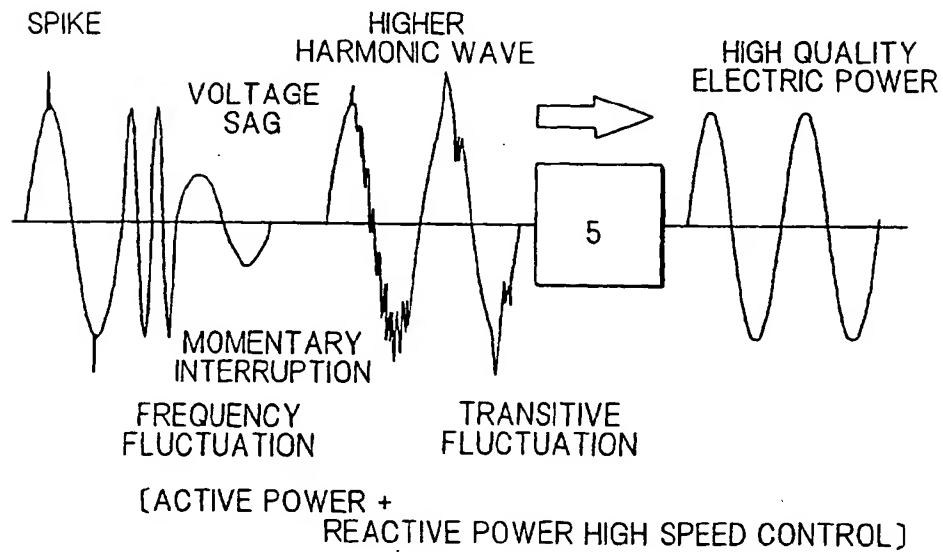


FIG. 9

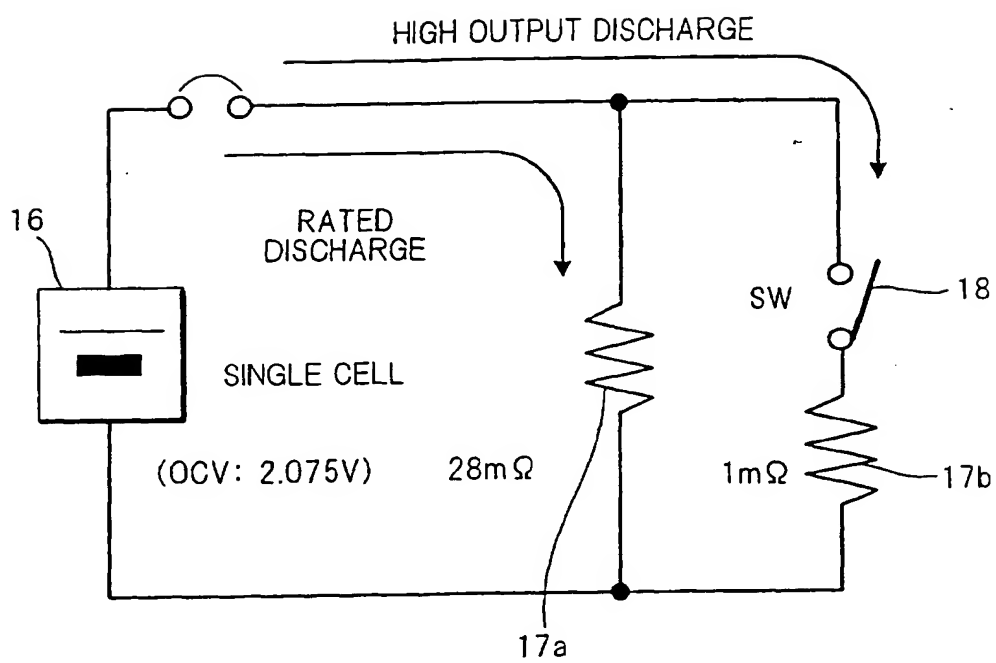


FIG. 10

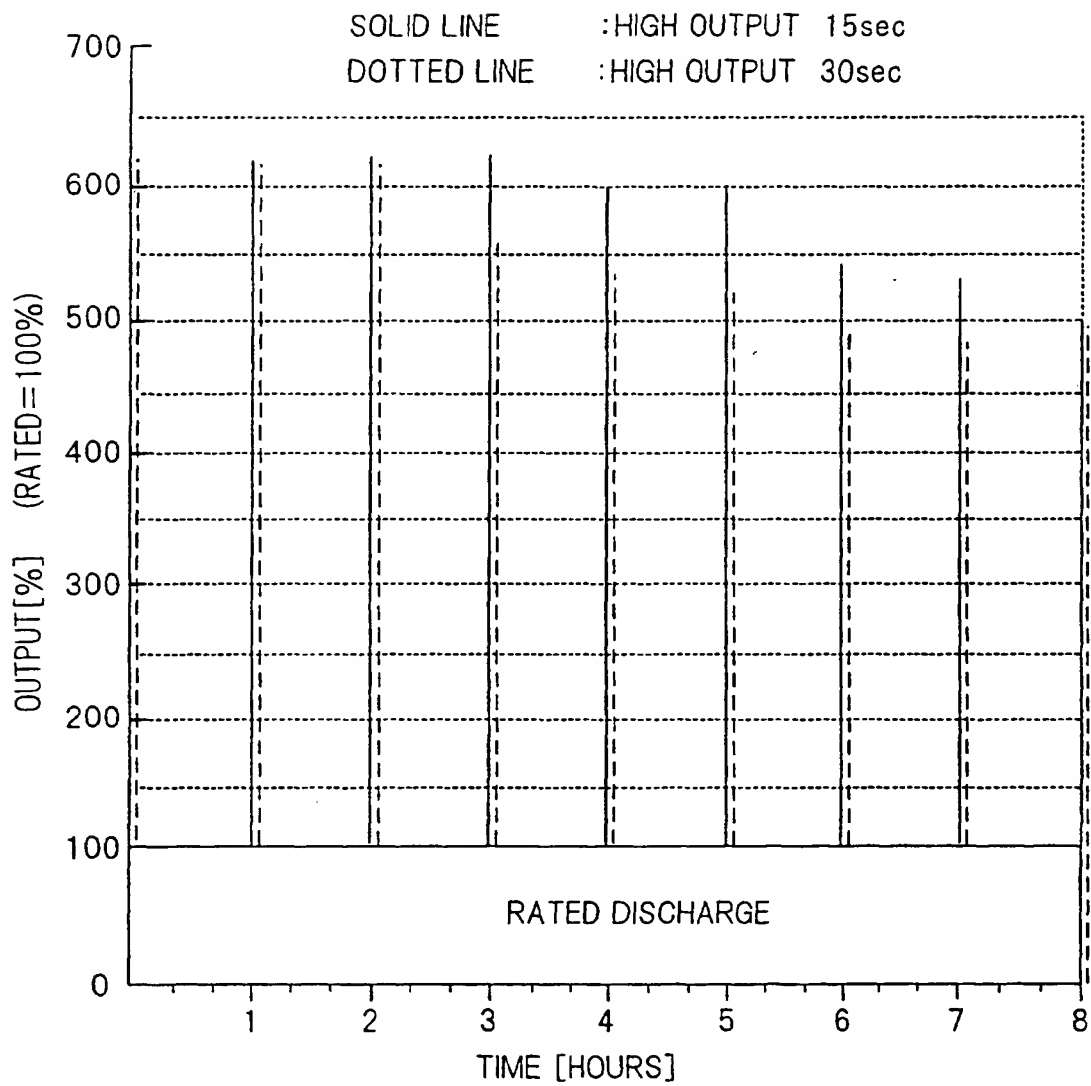


FIG. 11


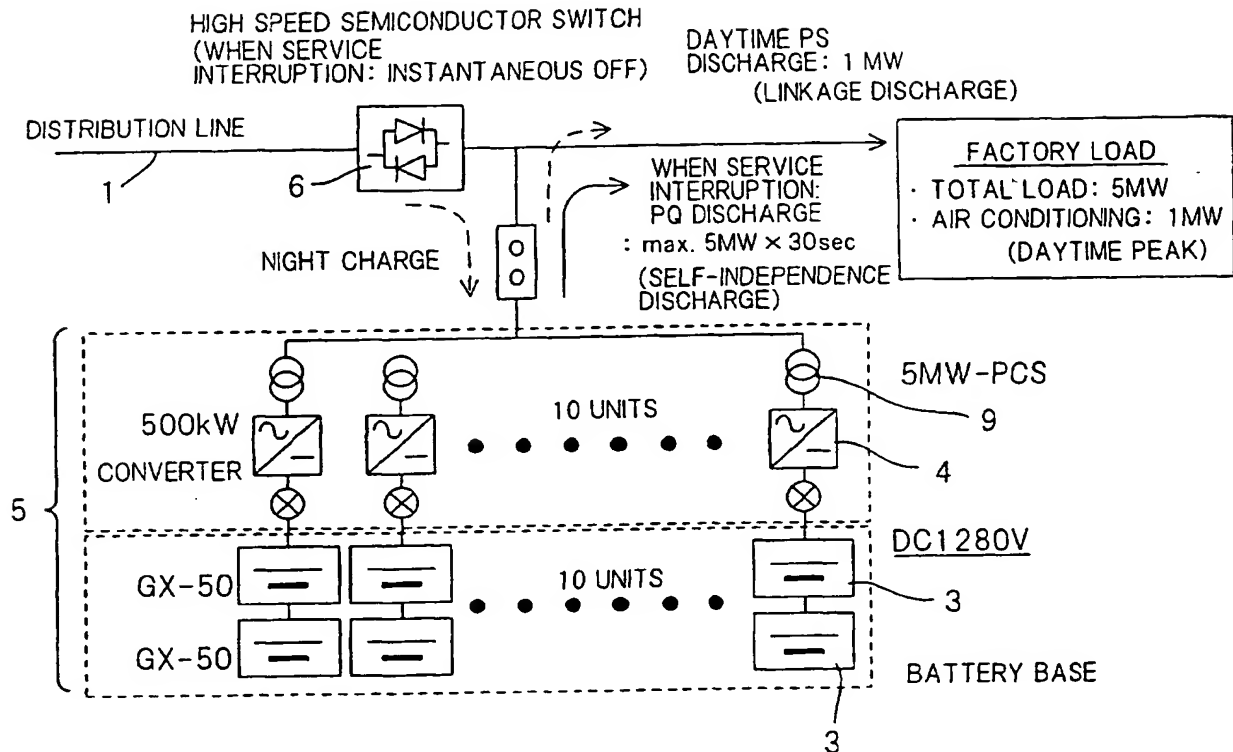


FIG. 12



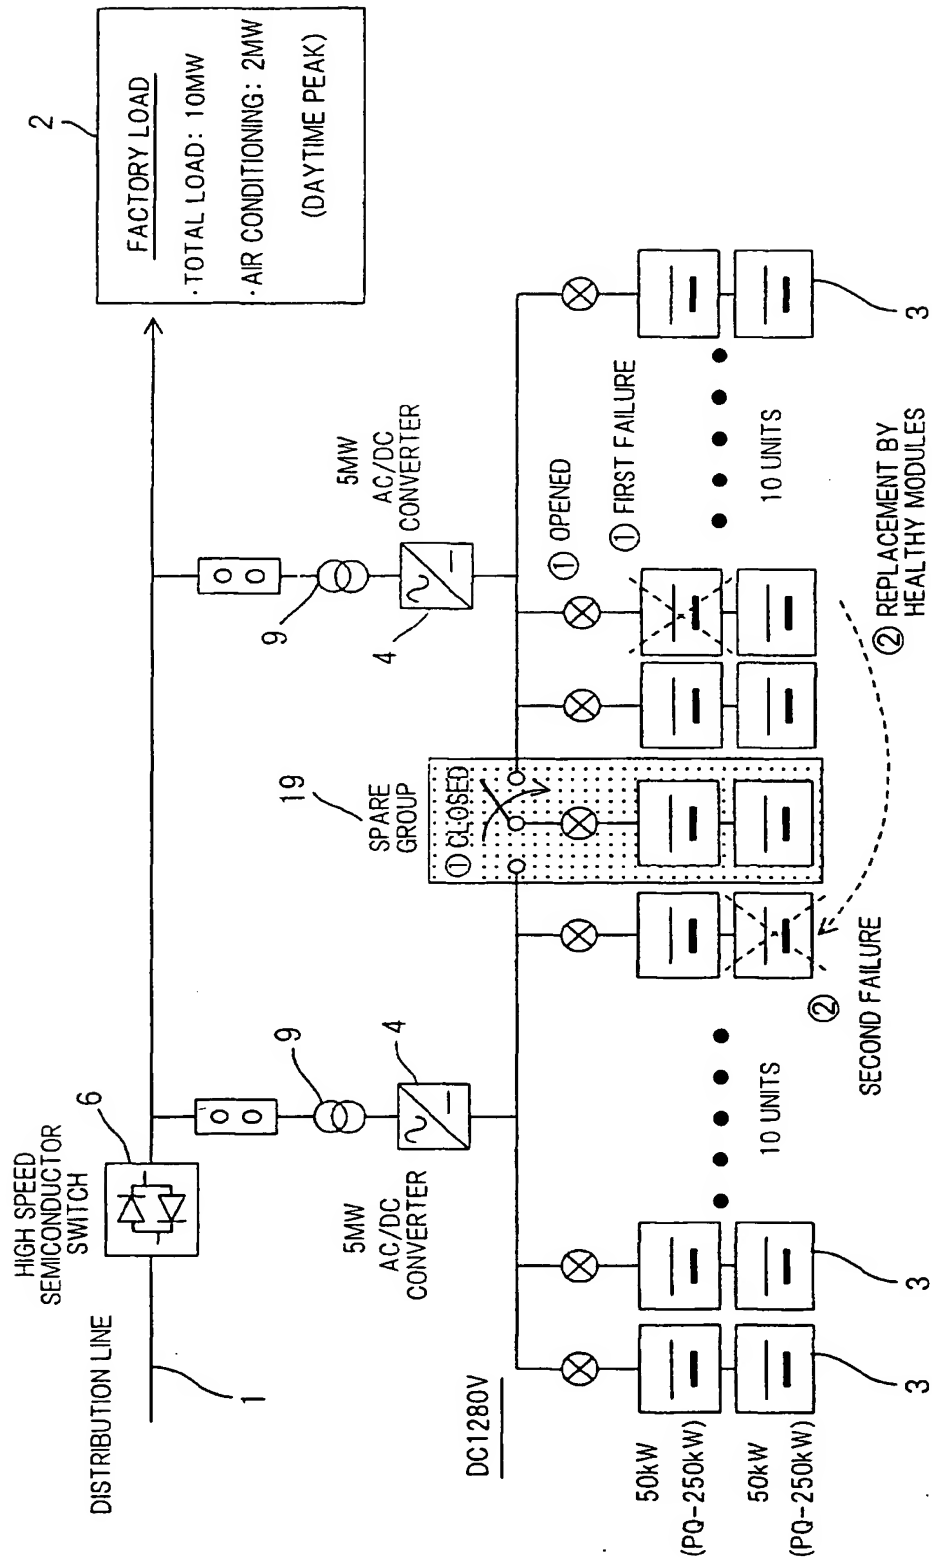

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
03.11.2004 Bulletin 2004/45

(51) Int Cl.7: **H02J 9/06, H02J 3/18,
H02J 3/32**

(43) Date of publication A2:
21.11.2001 Bulletin 2001/47

(21) Application number: **01304223.9**

(22) Date of filing: **11.05.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

• **The Tokyo Electric Power Co., Inc.**
Tokyo 100-0011 (JP)

(72) Inventor: **Abe, Hiroyuki, c/o NGK Insulators, Ltd.**
Nagoya City, Aichi Pref. 467-8530 (JP)

(30) Priority: **18.05.2000 JP 2000146834**

(74) Representative: **Paget, Hugh Charles Edward et al**
Mewburn Ellis LLP
York House
23 Kingsway
London WC2B 6HP (GB)


(71) Applicants:
• **NGK INSULATORS, LTD.**
Nagoya-City, Aichi Prefecture 467-8530 (JP)

(54) **High-temperature secondary battery based energy storage and power compensation system**

(57) The high temperature secondary battery based energy storage and power compensation system is so formed that electric power supply system, electric load, and electric energy storage system including a high temperature secondary battery and a power conversion system, are electrically connected with one another. When operating normally, electric power is supplied from the electric power supply system to the electric load, while the electric energy storage system operates to effect peak shaving running and load leveling running.

A high speed switch is provided between the electric power supply system and the electric energy storage system, so that when a voltage sag or a service interruption occurs while the electric power is being supplied from the electric power supply system, the voltage sag is immediately detected and the circuit is immediately shut off, an electric power is immediately supplied from the electric energy storage system to the electric load so as to compensate for the voltage sag or the service interruption.

FIG. 1

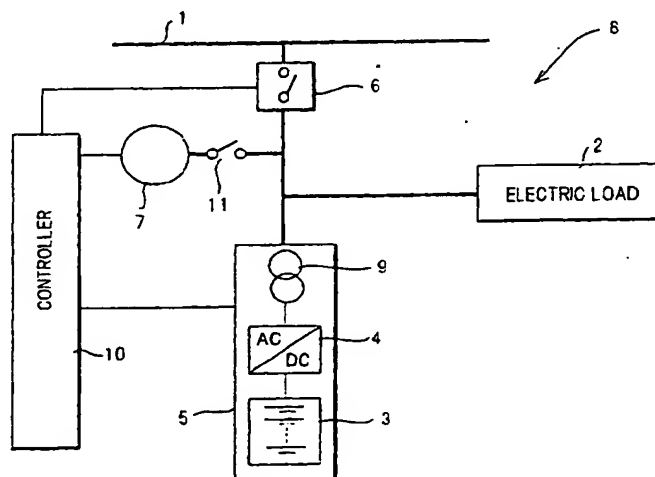



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 30 4223

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	MIYAZAKI S ET AL: "Immunity test results of a quick power failure detector of uninterruptible secondary battery system" 3 August 1997 (1997-08-03), POWER CONVERSION CONFERENCE - NAGAOKA 1997., PROCEEDINGS OF THE NAGAOKA, JAPAN 3-6 AUG. 1997, NEW YORK, NY, USA, IEEE, US, PAGE(S) 483-488, XP010257354 ISBN: 0-7803-3823-5 * the whole document *	1-3	H02J9/06 H02J3/18 H02J3/32
X	MIYAZAKI S ET AL: "Novel power conversion system for uninterruptible secondary battery system" PROCEEDINGS OF THE ICHQP. 7TH INTERNATIONAL CONFERENCE ON HARMONICS AND QUALITY OF POWER UNIV. NEVADA LAS VEGAS LAS VEGAS, NV, USA, 16 October 1996 (1996-10-16), - 18 October 1998 (1998-10-18) pages 655-660, XP008035084 * the whole document *	1-3	
Y	US 5 798 633 A (LARSEN EINAR V ET AL) 25 August 1998 (1998-08-25) * abstract * * column 1 - column 2, line 44 * * column 3, line 39 - column 4; figure 1 * * column 6, line 63 - column 12, line 64; figure 5 * ----- -/--	1-3,5	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 8 September 2004	Examiner Lorenzo Feijoo, S
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 03.92 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 01 30 4223

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	HUNT G W: "Operational experience and performance characteristics of a valve-regulated lead-acid battery energy-storage system for providing the customer with critical load protection and energy-management benefits at a lead-recycling plant" JOURNAL OF POWER SOURCES, ELSEVIER SEQUOIA S.A. LAUSANNE, CH, vol. 78, no. 1-2, March 1999 (1999-03), pages 171-175, XP004164200 ISSN: 0378-7753 * the whole document *	1-3,6	<div>TECHNICAL FIELDS SEARCHED (Int.Cl.7)</div>
Y	OKUYAMA R ET AL: "Relationship between the total energy efficiency of a sodium-sulfur battery system and the heat dissipation of the battery case" JOURNAL OF POWER SOURCES, ELSEVIER SEQUOIA S.A. LAUSANNE, CH, vol. 77, no. 2, February 1999 (1999-02), pages 164-169, XP004158415 ISSN: 0378-7753 * the whole document *	1-6	
Y	US 5 767 591 A (PINKERTON JOSEPH F) 16 June 1998 (1998-06-16) * abstract * * column 1; claim 17 *	4	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 8 September 2004	Examiner Lorenzo Feijoo, S
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 4223

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-09-2004

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5798633	A	25-08-1998	NONE
US 5767591	A	16-06-1998	AT 222416 T 15-08-2002
		AU 731620 B2 05-04-2001	
		AU 4263097 A 26-03-1998	
		BR 9712812 A 23-11-1999	
		CA 2264614 A1 12-03-1998	
		DE 69714746 D1 19-09-2002	
		DE 69714746 T2 24-04-2003	
		EP 0925628 A1 30-06-1999	
		JP 2001502519 T 20-02-2001	
		WO 9810503 A1 12-03-1998	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ ~~FADED~~ TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)